

IN BRONZE - SINT B51 -

(-Sint B51- nach DIN 30910)

Anlieferungs-Toleranzen: $d1 = G7$, $d2 = r6$, $b1 = \pm 0.1$


Kantenbrüche gemäss DIN 6784 mit -0.1mm bis -0.4mm max.

IMPRÄGNIERUNG

ISO VG68 (Mobil DTE Oil Heavy Medium)

geeignet für Lagertemperaturen bis max. 80°C

Viskosität 64 mm² /s bei 40°C / Stockpunkt – 9°C

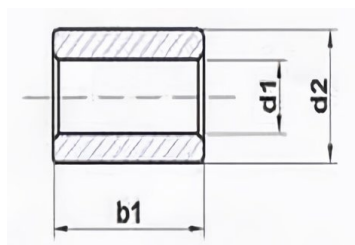

VERPACKUNGSEINHEIT MIND. 200 STÜCK			
Abmessung			Bestell-Nr.
D1	D2	B1	
1	3	2	500 010 314
2	4	2	500 020 401
2*	4	2.5	500 020 450*
2	4	3	500 020 403
2	4	6	500 020 406
2	5	2.5	500 020 504
2	5	5	500 020 515
2.5	5	4	500 020 550
3	6	6	500 030 606
3	6	10	500 030 624




ZYLINDERLAGER


3	10	4	500 031 004
4	7	6	500 040 705
4	7	7.5	500 040 725
4	8	6	500 040 821
4	8	8	500 040 808
5	8	6	500 050 805
5	8	12	500 050 812
5	9	12	500 050 912
5	10	8	500 051 008
6	9	8	500 060 908
6	10	6	500 061 003
6	10	10	500 061 010
6	10	12	500 061 039
6	12	10	500 061 214
6	12	12	500 061 212
7	10	12	500 071 012
8	12	6	500 081 221
8	12	10	500 081 225
8	12	12	500 081 212
8	12	16	500 081 237
8	14	10	500 081 401
8	14	16	500 081 413
13	13	10	500 101 310
10	14	8	500 101 409

10	14	13	500 101 413
10	14	15	500 101 415
10	15	12	500 101 512
10	16	13	500 101 613
12	16	10	500 121 610
12	16	12	500 121 604
12	16	16	500 121 607
12	18	12	500 121 802
12	18	17	500 121 817
12	18	20	500 121 804
12	18	30	500 121 830
12	20	15	500 122 002
12	20	20	500 122 020


* QUALITÄT = CUSN-LEGIERUNG MIT MAX. 2 GEW. % GRAPHIT
(SINT -A51- / -S2C- / DICHTE 6,2G / CM3)

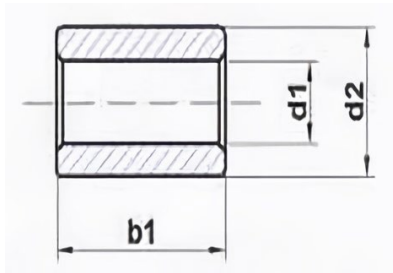


VERPACKUNGSEINHEIT MIND. 100 STÜCK			
Abmessung			Bestell-Nr.
D1	D2	B1	
13	19	24	500 131 924
14	20	14	500 142 014
14	20	20	500 142 020
15	20	15	500 152 015
15	22	8	500 152 201
15	22	12	500 152 202
15	22	18	500 152 218
16	20	20	500 162 020
16	20	25	500 162 003
16	22	16	500 162 227
16	22	18	500 162 218
16	22	25	500 162 228
16	24	28	500 162 404
18	22	18	500 182 218
18	24	15	500 182 415
18	24	22	500 182 423
18	25	20	500 182 520



VERPACKUNGSEINHEIT MIND. 100 STÜCK			
Abmessung			Bestell-Nr.
D1	D2	B1	
13	19	24	500 131 924
14	20	14	500 142 014
14	20	20	500 142 020
15	20	15	500 152 015
15	22	8	500 152 201
15	22	12	500 152 202
15	22	18	500 152 218
16	20	20	500 162 020
16	20	25	500 162 003
16	22	16	500 162 227
16	22	18	500 162 218
16	22	25	500 162 228
16	24	28	500 162 404
18	22	18	500 182 218
18	24	15	500 182 415
18	24	22	500 182 423
18	25	20	500 182 520

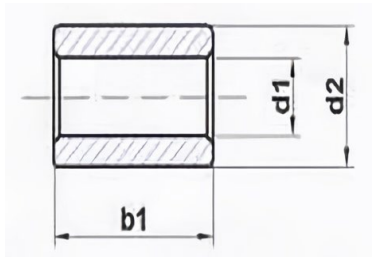

VERPACKUNGSEINHEIT MIND. 50 STÜCK			
Abmessung			Bestell-Nr.
D1	D2	B1	
18	25	25	500 182 525
20	25	25	500 202 525
20	26	20	500 202 620
20	26	25	500 202 625
20	26	30	500 202 608
20	28	20	500 202 806
20	28	25	500 202 807
20	28	30	500 202 830
20	30	20	500 203 003
22	28	20	500 222 820
22	28	25	500 222 806
22	28	32	500 222 805
25	30	20	500 253 005
25	32	25	500 253 204
25	32	30	500 253 230



VERPACKUNGSEINHEIT MIND. 20 STÜCK			
Abmessung			Bestell-Nr.
D1	D2	B1	
28	36	28	500 283 628
28	36	35	500 283 635
30	38	30	500 303 803
30	38	40	500 303 840
30	40	35	500 304 035
32	40	25	500 324 025
32	40	32	500 324 032
35	42	35	500 354 235
36	45	35	500 364 535
40	50	25	500 405 025
40	50	40	500 405 040

Weitere Abmessungen auf Anfrage!